

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the application of:

Attorney Docket No.: 1101.112US02

Ellingsrud et al.

Confirmation No.: 1254

Application No.: 10/801,045

Examiner: Bot L. Ledynh

Filed: March 15, 2004

Group Art Unit: 2862

For: ELECTROMAGNETIC METHODS AND APPARATUS FOR DETERMINING THE
NATURE OF SUBTERRANEAN RESERVOIRS USING REFRACTED
ELECTROMAGNETIC WAVES


SUBMISSION OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Enclosed is a certified copy of GB patent application number GB0119245.9 to
which the above-identified U.S. patent application corresponds.

Respectfully submitted,

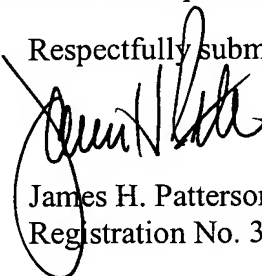
James H. Patterson
Registration No. 30,673

Customer No. 24113
Patterson, Thunte, Skaar & Christensen, P.A.
4800 IDS Center
80 South 8th Street
Minneapolis, Minnesota 55402-2100
Telephone: (612) 349-5741

Please grant any extension of time necessary for entry; charge any fee due to Deposit Account No. 16-0631.

CERTIFICATE OF MAILING

I hereby certify that this document is being deposited with the United States Postal Service with sufficient postage as first class
mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on

02/04/05
Date of Deposit


James H. Patterson



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

10,801,045

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

accordance with the Patents (Companies Re-registration) Rules 1982, if a company named this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name which it is so re-registered.

accordance with the rules, the words "public limited company" may be replaced by p.l.c., L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 20 January 2005

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)

The
Patent
Office

ORAU001 5551068-1 D00056
P01/7700 0.00-0119245.9

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

27 AUG 2001

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference DCR/P32182GB

2. Patent application number
(The Patent Office will fill in this part)

0119245.9

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Statoil ASA
N-4035 Stavanger
Norway

Patents ADP number (if you know it)

82044 30001

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

METHOD AND APPARATUS FOR DETERMINING THE NATURE OF SUBTERRANEAN RESERVOIRS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Kilburn & Strode
20 Red Lion Street
London
WC1R 4PJ

Patents ADP number (if you know it)

125001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 12

Claim(s) 3 *DM*

Abstract 1

Drawing(s) 3 + 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1 ✓

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 7/8/01

K. L. S. M.

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. D.C. Rees


Tel: 020 7539 4200

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

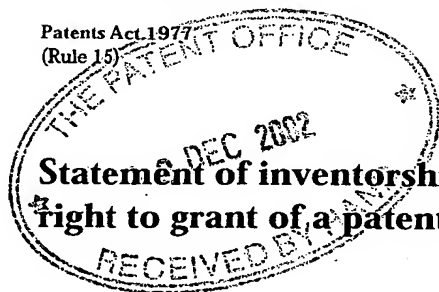


The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

0216137.8

1. Your reference DCR/P32182GB
2. Patent application number 0119245.9
(if you know it) A
3. Full name of the or of each applicant
Statoil ASA
4. Title of the invention
METHOD AND APPARATUS FOR DETERMINING THE NATURE OF SUBTERRANEAN RESERVOIRS
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent
By virtue of the terms of employment from the inventors to the applicant
6. How many, if any, additional Patents Forms 7/77 are attached to this form?
(see note (c)) 1
7. I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.

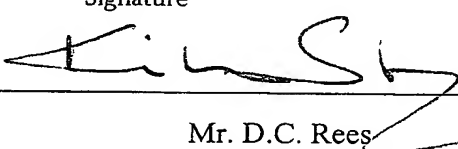Signature


Date
03-Dec-2002
8. Name and daytime telephone number of person to contact in the United Kingdom
Mr. D.C. Rees 020 7539 4200

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

KONG, Fan-Nian
Langbolgen 71
N-1150 Oslo
Norway

7827439001

Patents ADP number (if you know it):

WESTERDAHL, Harald
Haugeras
N-2072 Dal
Norway

7827421001

Patents ADP number (if you know it):

EIDESMO, Terje
Markapl. 5
N-7054 Ranheim
Norway

7827397001

Patents ADP number (if you know it):

Reminder

Have you signed the form?

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

ELLINGSRUD, Svein
Tyholt alle 9A
N-7052 Trondheim
Norway

7827405001

Patents ADP number *(if you know it):*

Patents ADP number <i>(if you know it):</i>

Patents ADP number <i>(if you know it):</i>

Reminder

Have you signed the form?

Method and Apparatus for Determining
the Nature of Subterranean Reservoirs

5 The present invention relates to a method and apparatus for determining the nature of submarine and subterranean reservoirs. The invention is particularly suitable for determining whether a reservoir, whose approximate geometry and location are known, contains hydrocarbons or water, and also for detecting reservoirs with particular characteristics.

10 Currently, the most widely used techniques for geological surveying, particularly in sub-marine situations, are seismic methods. These seismic techniques are capable of revealing the structure of the subterranean strata with some accuracy. However, whereas a seismic survey can reveal the location and shape of a potential reservoir, it can normally not reveal the nature of the reservoir.

15 The solution therefore is to drill a borehole into the reservoir. However, the costs involved in drilling an exploration well tend to be in the region of £25m and since the success rate is generally about 1 in 10, this tends to be a very costly exercise.

20 It is therefore an object of the invention to provide a system for locating a subterranean reservoir and for determining, its nature with greater certainty, without the need to sink a borehole.

25 It has been appreciated by the present applicants that while the seismic properties of hydrocarbon filled strata and water-filled strata do not differ significantly, their electromagnetic resistivities do differ. Thus, by using an electromagnetic surveying method, these differences can be exploited and the success rate in predicting the nature of a reservoir can be increased significantly. This represents potentially an

enormous cost saving.

Consequently, a method and apparatus embodying these principles from the basis of the present applicant's co-pending British patent application No. 0002422.4.

5

This contemplates a method of determining the nature of a subterranean reservoir whose approximate geometry and location are known, which comprises: applying a time varying electromagnetic field to the strata containing the reservoir; detecting the electromagnetic wave field response; seeking in the wave field response, a component representing a refracted wave from the hydrocarbon layer; and determining the content of the reservoir, based on the presence or absence of a wave component refracted by the hydrocarbon layer.

It also contemplates a method for searching for a hydrocarbon containing subterranean reservoir which comprises: applying a time varying electromagnetic field to subterranean strata; detecting the electromagnetic wave field response; seeking, in the wave field response, a component representing a refracted wave; and determining the presence and/or nature of any reservoir identified based on the presence or absence of a wave component refracted by hydrocarbon layer.

20

It further contemplates an apparatus for determining the nature of a subterranean reservoir whose approximate geometry and location are known, or for searching for a hydrocarbon containing subterranean reservoir, the apparatus comprising: means for applying a time varying electromagnetic field to the strata containing the reservoir; means for detecting the electromagnetic wave field response; and means for seeking, in the wave field response, a component representing a refracted wave, thereby enabling the presence and/or nature of a reservoir to be determined.

25

A refracted wave behaves differently, depending on the nature of the stratum in which it is propagated. In particular, the propagation losses in hydrocarbon stratum are much lower than in a water-bearing stratum while the speed of propagation is much higher. Thus, when an oil-bearing reservoir is present, and an EM field is applied, a strong and rapidly propagated refracted wave can be detected. This may therefore indicate the presence of the reservoir or its nature if its presence is already known.

Electromagnetic surveying techniques in themselves are known. However, they are not widely used in practice. In general, the reservoirs of interest are about 1 km or more below the seabed. In order to carry out electromagnetic surveying as a stand alone technique in these conditions, with any reasonable degree of resolution, short wavelengths are necessary. Unfortunately, such short wavelengths suffer from very high attenuation. Long wavelengths do not provide adequate resolution. For these reasons, seismic techniques are preferred.

However, while longer wavelengths applied by electromagnetic techniques cannot provide sufficient information to provide an accurate indication of the boundaries of the various strata, if the geological structure is already known, they can be used to determine the nature of a particular identified formation, if the possibilities for the nature of that formation have significantly differing electromagnetic characteristics. The resolution is not particularly important and so longer wavelengths which do not suffer from excessive attenuation can be employed.

The resistivity of seawater is about 0.3 ohm-m and that of the overburden beneath the seabed would typically be from 0.3 to 4 ohm-m, for example about 2 ohm-m. However, the resistivity of a hydrocarbon reservoir is likely to be about 20-300 ohm-m. Typically, therefore, the resistivity of a hydrocarbon-bearing formation will

be 20 to 300 times greater than that of a water-bearing formation. This large difference can be exploited using the techniques of the present invention.

5 The electrical resistivity of a hydrocarbon reservoir normally is far higher than the surrounding material (overburden). EM-waves attenuate more rapidly, and travel slower inside a low resistivity medium, compared to a high resistivity medium. Consequently, hydrocarbon reservoir will attenuate EM-waves less, compared to a lower resistivity overburden. Furthermore, the EM-wave speed will be higher inside the reservoir.

10 Thus, an electric dipole transmitter antenna on or close to the sea floor induces electromagnetic EM fields and currents in the sea water and in the subsurface strata. In the sea water, the EM-fields are strongly attenuated due to the high conductivity in the saline environment, whereas the subsurface strata with less conductivity causes less attenuation. If the frequency is low enough (in the order of 1 Hz), the EM energy is able to penetrate deep into the subsurface, and deeply buried geological layers having higher electrical resistivity than the overburden (as e.g. a hydrocarbon filled reservoir) will affect the EM-waves. Depending on the angle of incidence and state of polarisation, an EM wave incident upon a high resistive layer may excite a ducted (guided) wave mode in the layer. The ducted mode is propagated laterally along the layer and leaks energy back to the overburden and receivers positioned on the sea floor. In the present application, such a wave mode is referred to as a "refracted wave".

20 25 The distance between the EM source and a receiver is referred to as the offset. Due to the fact that a refracted wave in a hydrocarbon-bearing formation will be less attenuated than a direct wave in seawater (or in the overburden), for any given H/C bearing formation, there will be a critical offset at which the refracted wave and the

direct wave will have the same signal strength. This may typically be about two to three times greater than the shortest distance from the source (or receiver to the H/C bearing formation). Thus, when the offset is greater than the critical offset, the radial EM waves that are refracted into, and guided through the reservoir, will pay a major contribution to the received signal. The receiver signal will be of greater magnitude and arrive earlier (i.e. have smaller phase) compared to the case where there is no HC reservoir. In many cases, the phase change and/or magnitude change recorded at distances greater than the critical offset, may be directly used for calculation of the reservoir resistivity. Furthermore, the reservoir depth may be inferred from the critical offset and/or the phase and magnitude slopes for various source - receiver offsets.

The present invention has arisen from this realisation.

According to one aspect of the present invention, there is provided, a method of investigating subterranean strata which comprises: deploying an electric dipole transmitter antenna; deploying an electric dipole receiver antenna at a predetermined offset distance from the transmitter; applying an electromagnetic (EM) field to the strata using the transmitter; detecting the EM wave field response using the receiver, extracting phase information from the wave response; repeating the procedure with the transmitter and/or receiver in different locations for a plurality of transmissions; and using the phase information from the wave response for the plurality of transmissions, in order to determine the presence and/or nature of the reservoir.

Thus, the offset can be varied by moving the receiver; or indeed the transmitter, or even both. Alternatively, the predetermined offset can be kept constant by moving both the transmitter and receiver.

Thus, the horizontal boundaries of the reservoir may be found by analysing the slope and/or slope change of the curve(s) of phase and/or magnitude as a function of source-receiver offset distance or position, or by analysing the variation in phase and/or magnitude for a fixed source-receiver offset at several locations. The most
5 useful source-receiver offset is typically larger than the "critical offset". In this part of the curve, the change in slope, may indicate the reservoir boundary.

Both the source and the receiver are preferably inside the reservoir area to achieve the smallest slope (or gradient). This is true for both the phase and the magnitude
10 curves. Soon after either the source or the receiver leaves the reservoir area, the slopes increases rapidly. From the position where this change occurs, the reservoir boundary may be mapped. The true reservoir boundary will probably lie closer the centre of the reservoir compared to the location where the slope change occurred, typically 10 to 20% of the reservoir depth. The detailed position may be calculated
15 using the measured data and forward modelling.

This technique of the invention can be used in conjunction with conventional seismic techniques to identify hydrocarbon reservoirs.

20 If the offset between the transmitter and receiver is significantly greater than three times the depth of the reservoir from the seabed (i.e. the thickness of the overburden), it will be appreciated that the attenuation of the refracted wave will often be less than that of direct wave and the reflected wave. The reason for this is the fact that the path of the refracted wave will be effectively distance from the
25 transmitter down to the reservoir i.e. the thickness of the overburden, plus the offset along the reservoir, plus the distance from the reservoir up to the receivers i.e. once again the thickness of the overburden.

If no H/C reservoir is present in the area of the transmitter and receiver, the phase of the detected wave response will consist of a direct wave and will therefore change linearly with a changing offset. Similarly, the phase of the detected wave response will remain constant at a constant offset in different locations.

5

However, if an H/C reservoir is present, there will be a refracted wave component in the wave response and this may predominate. Due to the higher phase velocity (wavespeed) in H/C filled strata, this will have an effect on the phase of the received wave response. In the case of an increasing offset, the phase will not change linearly; a plot of phase against offset will be a curve with a constantly changing slope. Thus, a change from a straight line to a curve, or vice versa, will indicate the boundary of an H/C reservoir.

10

In the case of a constant offset, the presence of an H/C reservoir will give rise to a constant but different phase value at different locations compared to the situation where no H/C reservoir is present. Thus, a change in phase value will indicate the boundary of an H/C reservoir.

15

Preferably, the procedure is repeated at different offsets.

20

In one embodiment, the method includes plotting a graph of the phase of the refracted wave response from a particular stratum against offset and analysing the slope of the graph in order to determine the nature of the stratum. Alternatively; the method includes plotting a graph of the phase of the reflected wave response from a particular stratum and identifying a change in the slope of the graph.

25

In another embodiment, the method comprises repeating the procedure at different locations, using the same predetermined offset, and analysing the phase of the

refracted wave response from a particular stratum in order to identify a change in the phase value.

5 The polarization of the source transmission will determine how much energy is transmitted into the oil-bearing layer in the direction of the receiver. A dipole antenna is therefore the selected transmitter. In general, it is preferable to adopt a dipole with a large effective length. The transmitter dipole may therefore be 100 to 1000 meters in length and may be towed in two orthogonal directions. The receiver dipole optimum length is determined by the thickness of the overburden.

10 The technique can be applicable in exploring land-based subterranean reservoirs but is especially applicable to submarine, in particular sub-sea, subterranean reservoirs. Preferably the field is applied using one or more transmitters located on the earth's surface, and the detection is carried out by one or more receivers located on the earth's surface. In a preferred application, the transmitter(s) and/or receivers are located on or close to the seabed or the bed of some other area of water.

15 The transmitted field may be pulsed, however, a coherent continuous wave optionally with stepped frequencies is preferred. It may be transmitted for a significant period of time, during which the transmitter should preferably be stationary (although it could be moving slowly), and the transmission stable. Thus, the field may be transmitted for a period of time from 3 seconds to 60 minutes, preferably from 10 seconds to 5 minutes, for example about 1 minute. The receivers may also be arranged to detect a direct wave as well as the refracted wave from the reservoir, and the analysis may include extracting phase and amplitude data of the refracted wave from corresponding data from the direct wave.

25 Preferably, the wavelength of the transmission should be in the range

$$0.1s \leq \lambda \leq 5s;$$

5 where λ is the wavelength of the transmission through the overburden and s is the distance from the seabed to the reservoir. More preferably λ is from about $0.5s$ to $2s$. The transmission frequency may be from 0.01 Hz to 1 kHz, preferably from 0.1 to 20 Hz, for example 1 Hz.

10 Preferably, the distance between the transmitter and a receiver should be in the range

$$0.5 \lambda \leq L \leq 10 \lambda;$$

15 where λ is the wavelength of the transmission through the overburden and L is the distance between the transmitter and the first receiver.

It will be appreciated that the present invention may be used to determine the position, the extent, the nature and the volume of a particular stratum, and may also be used to detect changes in these parameters over a period of time.

20 The present invention also extends to a method of surveying subterranean measures which comprises; performing a seismic survey to determine the geological structure of a region; and where that survey reveals the presence of a subterranean reservoir, subsequently performing a method as described above.

25 The invention may be carried into practice in various ways and will now be illustrated in the following simulated Examples. In the accompanying drawings,

Figure 1 is a schematic representation of a situation in which measurements are taken outside the area of a reservoir;

Figure 2 is a schematic representation of a situation in which measurements are taken inside the area of a HC reservoir;

5 Figure 3 is a schematic representation of a situation in which measurements are taken crossing a H/C reservoir boundary;

Figure 4 is a view similar to Figure 3, in which the receiver is in a borehole; and

10 Figure 5 is a graphical representation of the results from the situations in Figures 1 to 4.

In Figures 1 to 4, it is assumed that the sea 11 has a resistivity of 0.3 ohm-m and a depth of 1000m from the surface 12 to the seabed 13. The overburden 14 has a
15 resistivity of 0.7 ohm-m. The transmitted wave had a frequency of 1 Hz.

Figure 1 shows the situation where a receiver 15 and a transmitter 16 are located on the seabed 13 in a region where there is no subterranean reservoir. The position of the receiver 15 is fixed. The transmitter 16 is moved to various different positions
20 resulting in different offsets from the receiver 15. At each position of the transmitter 16, an EM field is transmitted and the wave field response is detected by the receiver 15. The wave field response includes a direct wave component and reflected wave components. Phase information is extracted for each response and the results are plotted as a graph in Figure 5. The plot of phase against offset (source-receiver
25 distance) is a straight line 51, showing that the phase varies linearly with offset.

Figure 2 shows the situation where the transmitter 15 and receiver 16 are deployed in a region where there is a subterranean H/C reservoir 17. The reservoir 17 is 100m thick and has a resistivity of 50 ohm-m, and is located at a depth of 800 m

beneath the seabed 13. The procedure described in relation to Figure 1 is repeated and again the results are shown in Figure 5.

5 In this case, the wave field response additionally includes a refracted wave component from the reservoir 17. This affects the phase of the response and results in the plot of phase against offset taking the form of a smooth curve 52, with a constant change of slope.

10 Figure 3 shows the situation where the transmitter 15 and receiver 16 are deployed in a region where there is an H/C reservoir 18 with a boundary 19. The reservoir 18 is similar to that in Figure 2 but its boundary 19 is at a position 3km away from the position of the transmitter 15. Again, the procedure described in relation to Figure 1 is repeated and the results are shown in Figure 5.

15 In this case, the wave field response phase curve 53 initially follows the curve 52 of the results from Figure 2 but soon after an offset of 3km, the results follow a straight line which has the same slope as the line 51 of the Figure 1 situation. The change in slope of the curve 52 clearly shows the presence of a boundary between an H/C reservoir and no H/C reservoir. The position of the boundary 19 can be deduced
20 from the position of the change in slope.

The situation shown in Figure 4 is similar to that of Figure 3 except that in this case, the receiver 25 is located in a well bore 27 and the transmitter 26 is moved to different locations to vary the offset. Once again, the procedure described in
25 relation to Figure 1 was repeated and the results are shown in Figure 5.

Due to the location of the receiver 25 in a well bore 27 and within the reservoir 18, the phase curve 54, as the offset increases, follows a straight line initially. The

slope of the initial portion is shallower than the slope of the curve 51 where no H/C reservoir was present, due to the effect of the presence of a direct wave propagated through the H/C reservoir. However, soon after an offset of 3km, the slope of the curve 54 begins to change and continues to change until it attains the same slope as the curve 51 of Figure 1. This change again shows clearly the presence of an H/C reservoir boundary and its position can be deduced from the position of the change in the slope of the curve 54.

Claims

1. A method of investigating subterranean strata which comprises: deploying an electric dipole transmitter antenna; deploying an electric dipole receiver antenna at a predetermined offset distance from the transmitter; applying an electromagnetic (EM) field to the strata using the transmitter; detecting the EM wave field response using the receiver, extracting phase information from the wave response; repeating the procedure with the transmitter and/or receiver in different locations for a plurality of transmissions; and using the phase information from the wave response for the plurality of transmissions, in order to determine the presence and/or nature of the reservoir.
2. A method as claimed in Claim 1, in which the procedure is repeated at different offsets.
3. A method as claimed in Claim 2, which includes plotting a graph of the phase of the refracted wave response from a particular stratum against offset and analysing the slope of the graph in order to determine the nature of the stratum.
4. A method as claimed in Claim 2, which includes plotting a graph of the phase of the reflected wave response from a particular stratum and identifying a change in the slope of the graph.
5. A method as claimed in Claim 1, which comprises repeating the procedure at different locations, using the same predetermined offset, and analysing the phase of the refracted wave response from a particular stratum in order to identify a change in the phase value.

6. A method as claimed in any preceding Claim, in which the transmitter and/or receiver is located on or close to the seabed or the bed of some other area of water.

5 7. A method as claimed in any preceding Claim, in which the frequency of the EM field is continuously varied over the transmission period.

8. A method as claimed in any preceding Claim, in which the field is transmitted for a period of time for 3 seconds to 60 minutes.

10 9. A method as claimed in Claim 8, in which the transmission time is from 10 seconds to 5 minutes.

10. A method as claimed in any preceding Claims, in which the wavelength of the transmission is given by the formula
15

$$0.1s \leq \lambda \leq 10s;$$

20 wherein λ is the wavelength of the transmission through the overburden and s is the distance from the seabed to the reservoir.

11. A method as claimed in any preceding Claim, in which the predetermined offset between the transmitter and a receiver is given by the formula:
25

$$0.5\lambda \leq L \leq 10\lambda;$$

30 where λ is the wavelength of the transmission through the overburden and L is the distance between the transmitter and the receiver.

12. A method as claimed in any of Claims 7 to 11, in which the transmission frequency is from 0.01 Hz to 1 kHz.

5 13. A method as claimed in Claim 12, in which the transmission frequency is from 0.1 to 20 Hz.

10 14. A method as claimed in any preceding Claim, which includes suppressing the direct wave and/or any other known wave contribution that may disturb the measurements, thereby reducing the required dynamic range of the receiver and increasing the resolution of the refracted wave.

15 15. A method of surveying subterranean measures which comprises: performing a seismic survey to determine the geological structure of a region and where that survey reveals the presence of a subterranean reservoir, subsequently performing a method as claimed in any preceding Claim.

Abstract

A system for investigating subterranean strata. An electromagnetic field is applied using a dipole antenna transmitter and this is detected using a dipole antenna receiver.

- 5 Phase information is extracted from a refracted wave response and used to identify the presence and/or nature of a subterranean reservoir.

1/3

BEST AVAILABLE COPY

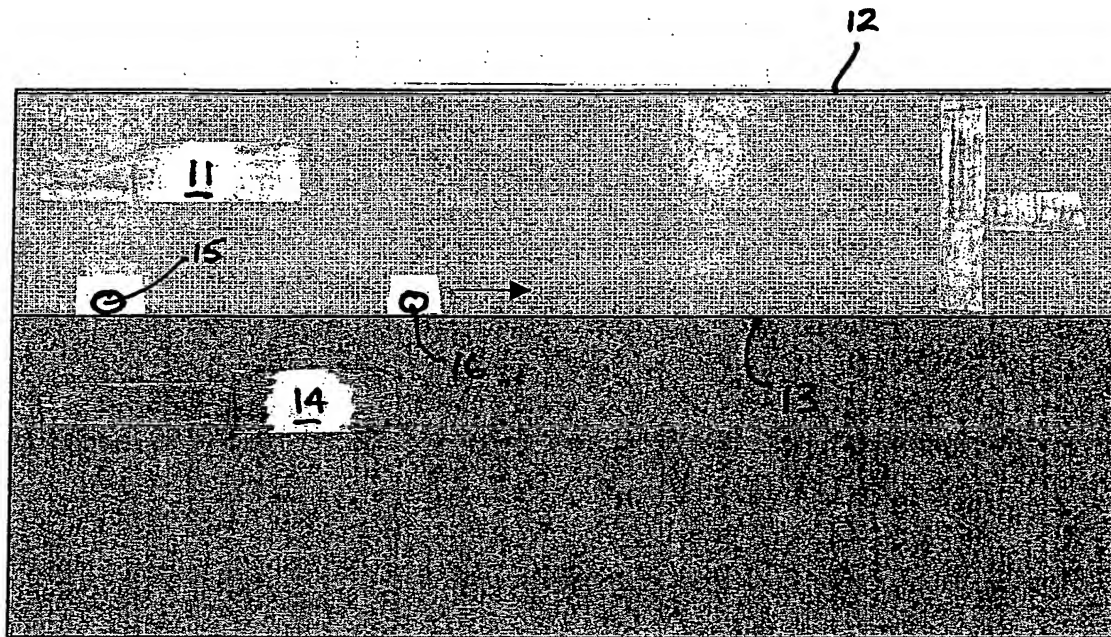


Fig 1

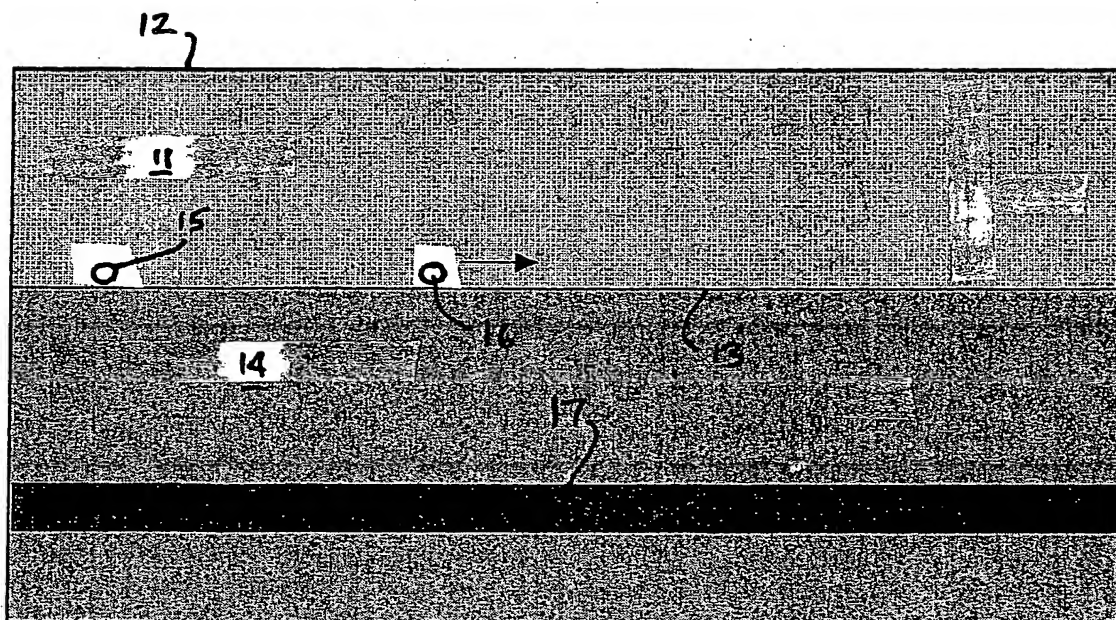


Fig 2

2/3

BEST AVAILABLE COPY

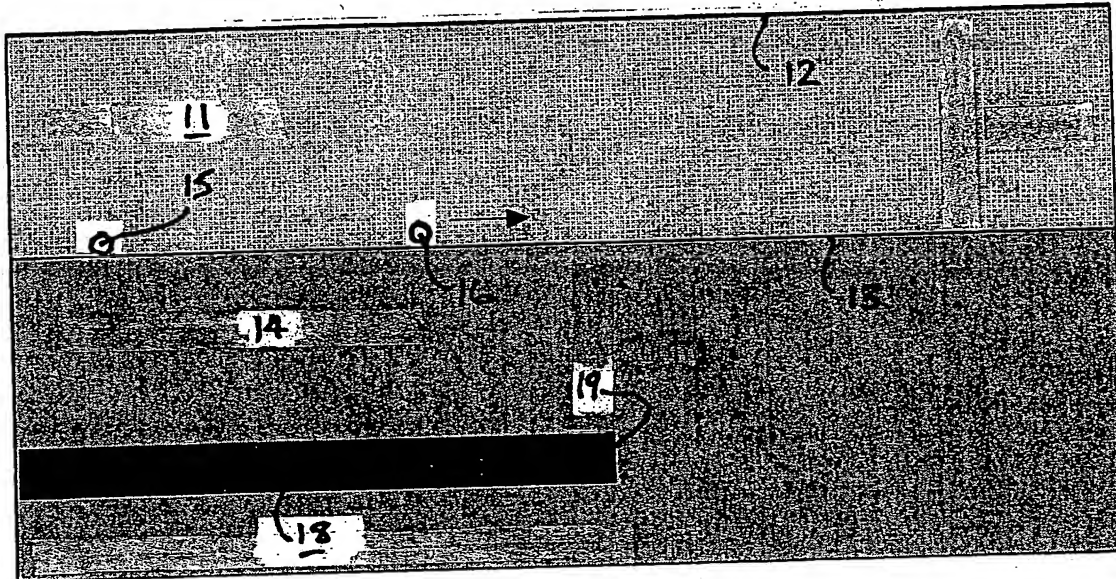


Fig 3

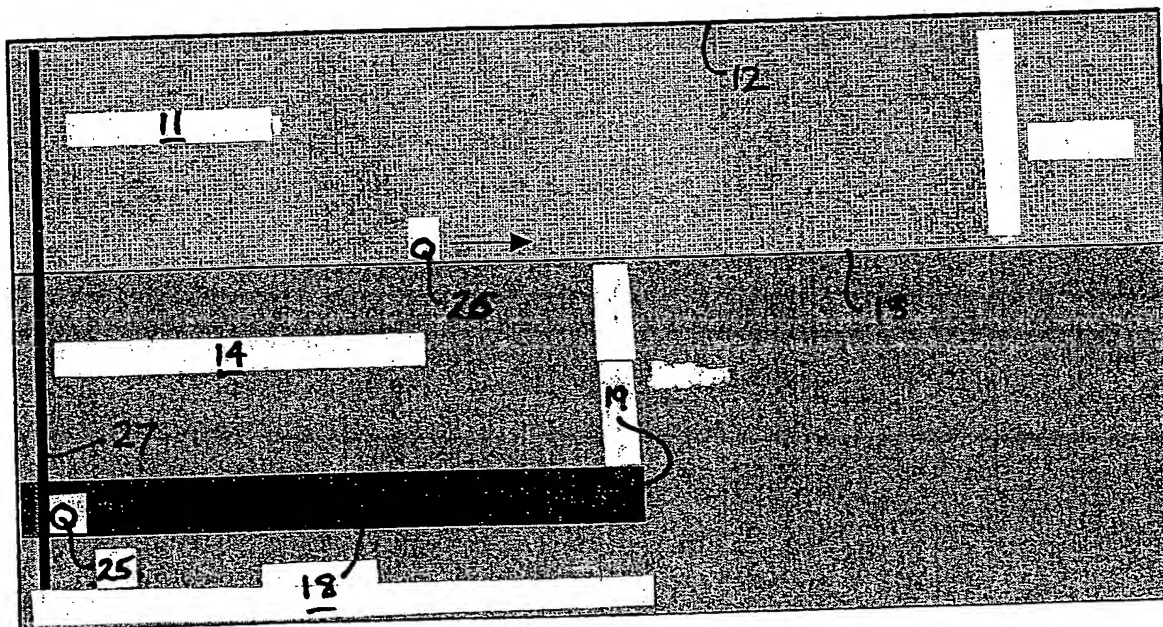


Fig 4

Modelled Phase Response, 1Hz, radial component

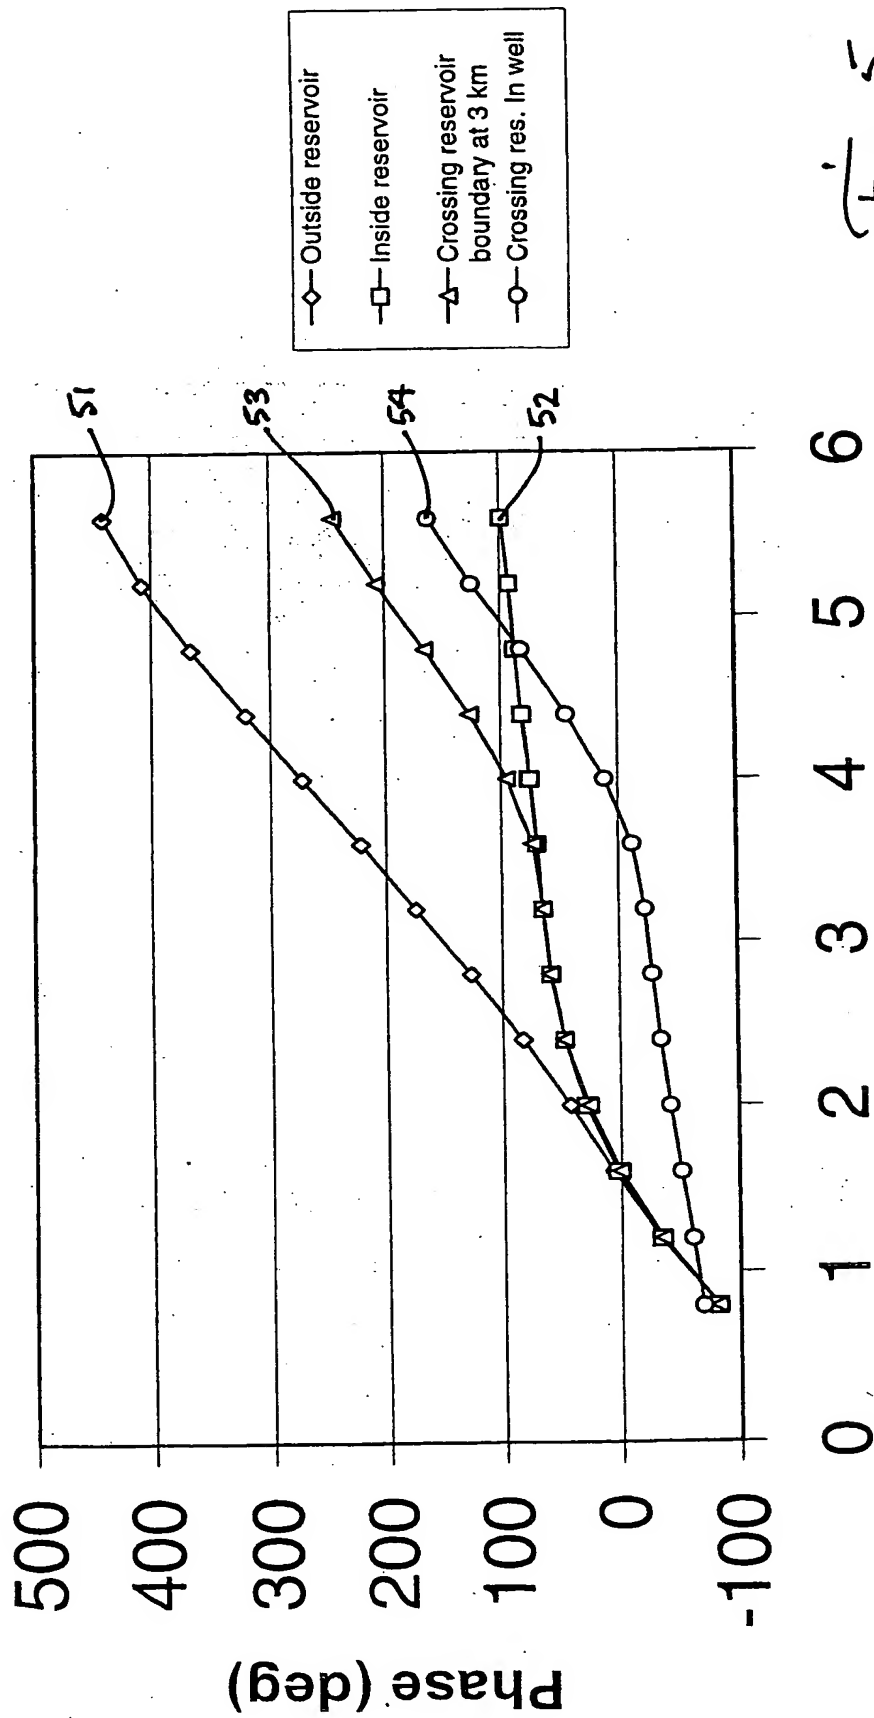


Fig 5

Source-receiver distance (km)